
Charge collection efficiency of oxygenated Micron barrel detectors after 3 10¹⁴ p cm⁻² (111 silicon)

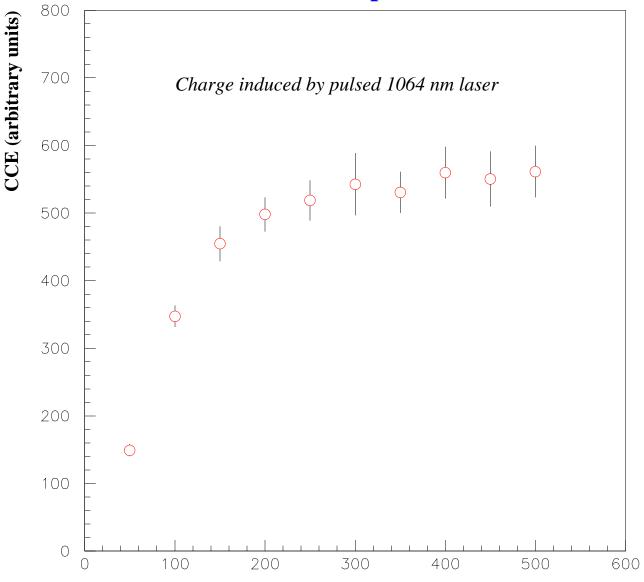

Bias (volts)