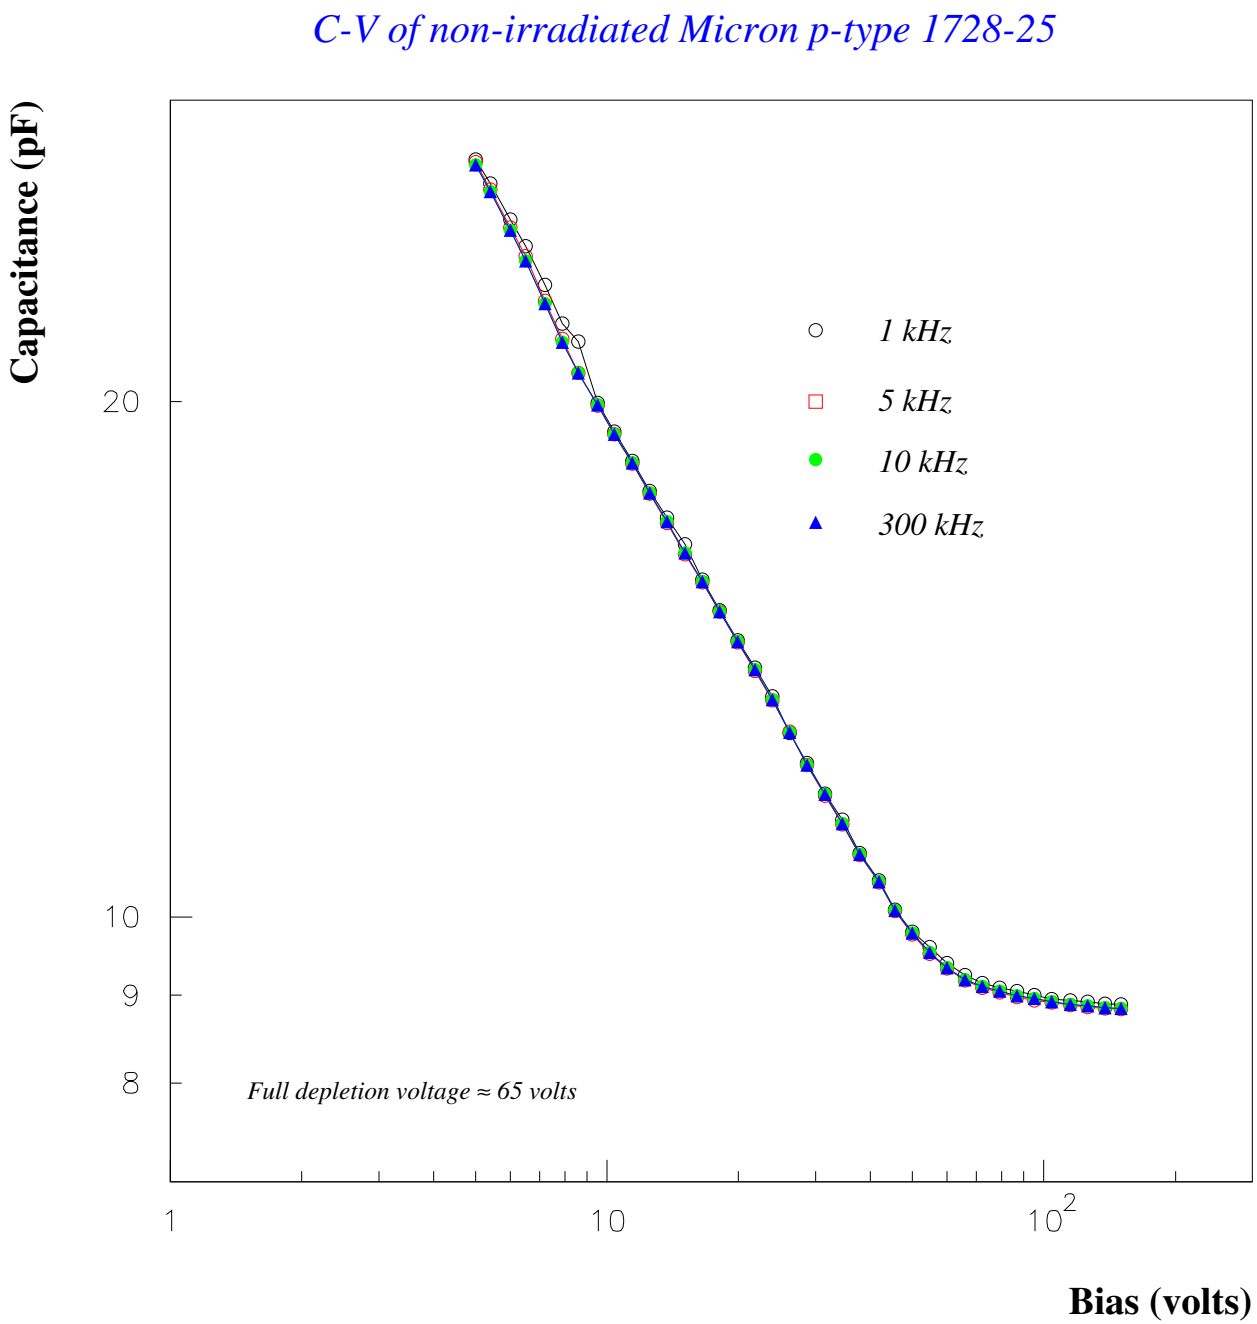
C-V of non-irradiated Micron p-type 1728-25
Capacitance (pF)
20
10
9
8
1 kHz
5 kHz
10 kHz
300 kHz
Full depletion voltage ≈ 65 volts
1
10
10^2
Bias (volts)